L41

pag. 018 – 019 – 020 – 021
Vetro laccato grigio
/ grey lacquered glass
pag. 022 – 024 – 025
Legno Thermowood
/ Thermowood
pag. 027 – 028 – 029
laccato lucido grigio tortora
/ dove grey gloss lacquer

versione per muratura / brickwall

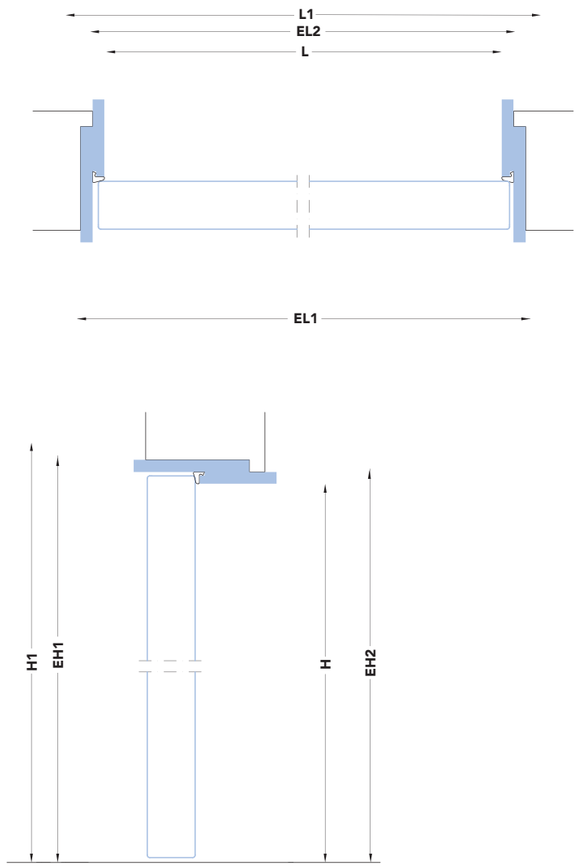

versione per cartongesso / drywall

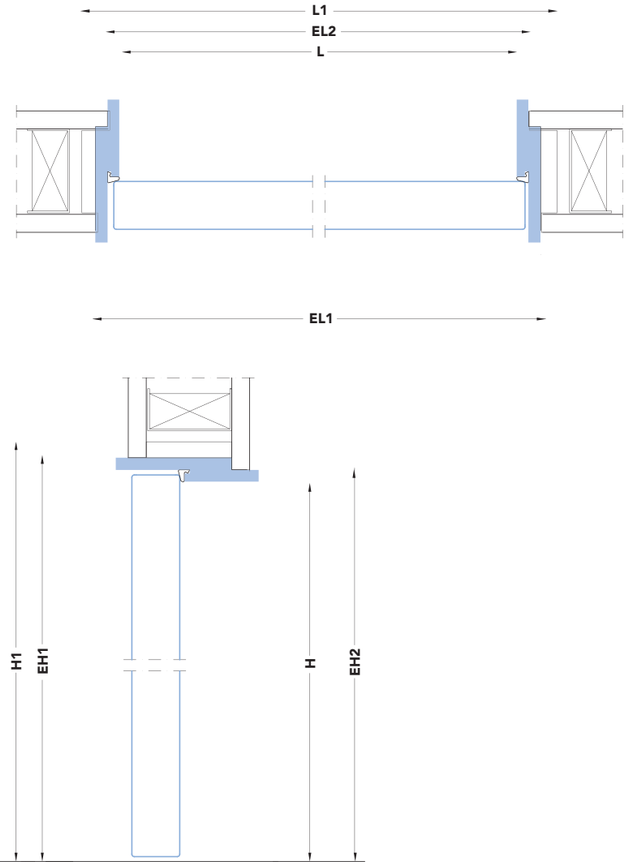

L41

Porta con battente a struttura tamburata di spessore mm 41 a lavorazione ultimata, con finitura laccato opaco, lucido ed essenze di serie; oppure con battente con telaio perimetrale in alluminio e lastre di vetro.
Stipite in alluminio bianco o nero opaco. Guarnizioni di Battuta.
Cerniere a scomparsa.
Montaggio su falso telaio dedicato.

Swinging door with a hollow core structure; 1 3/4". thick. Factory pre-finish available in matt and polished lacca as well as Lualdi's standard wood veneers. Glass door version is obtained with aluminum surrounding and choice of full size light glass .The frame is available in white or black matt. Included are silencer and concealed hinges. Installation require a subframe

L
Larghezza luce netta
Opening width
cm 60 23 5/8"
cm 70 27 1/2"
cm 80 31 1/2"
cm 90 35 3/8"

L1 - H1
Ingombro falso telaio
Subframe dimensions
cm 70x215 27 1/2"x 84 1/2"
cm 80x215 21 1/2"x 84 1/2"
cm 90x215 35 3/8"x 84 1/2"
cm 100x215 38 3/4"x 84 1/2"

H
Altezza luce netta
Opening height
cm 210-300 82 5/8"-118 1/4"

EL1 - EH1
Ingombro max esterno stipite
Frame max external dimensions
cm 65x212,5-302,5 25 5/8"x83 5/8"-119 1/8"
cm 75x212,5-302,5 29 5/8"x83 5/8"-119 1/8"
cm 85x212,5-302,5 33 5/8"x83 5/8"-119 1/8"
cm 95x212,5-302,5 37 5/8"x83 5/8"-119 1/8"

EL2 - EH2
Ingombro stipite
Frame external dimensions
cm 63x211,5-301,5 24 7/8"x83 3/8"-118 3/4"
cm 73x211,5-301,5 28 5/8"x83 3/8"-118 3/4"
cm 83x211,5-301,5 32 3/4"x83 3/8"-118 3/4"
cm 93x211,5-301,5 37 1/2"x83 3/8"-118 3/4"

L
Larghezza luce netta
Opening width
cm 60 23 5/8"
cm 70 27 1/2"
cm 80 31 1/2"
cm 90 35 3/8"

L1-H1
Ingombro falso telaio
Subframe dimensions
cm 70x215 27 1/2"x 84 1/2"
cm 80x215 21 1/2"x 84 1/2"
cm 90x215 35 3/8"x 84 1/2"
cm 100x215 38 3/4"x 84 1/2"

H
Altezza luce netta
Opening height
cm 210-300 82 5/8"-118 1/4"

EL1 - EH1
Ingombro max esterno stipite
Frame max external dimensions
cm 65x212,5-302,5 25 5/8"x83 5/8"-119 1/8"
cm 75x212,5-302,5 29 5/8"x83 5/8"-119 1/8"
cm 85x212,5-302,5 33 5/8"x83 5/8"-119 1/8"
cm 95x212,5-302,5 37 5/8"x83 5/8"-119 1/8"

EL2 - EH2
Ingombro stipite
Frame external dimensions
cm 63x211,5-301,5 24 7/8"x83 3/8"-118 3/4"
cm 73x211,5-301,5 28 5/8"x83 3/8"-118 3/4"
cm 83x211,5-301,5 32 3/4"x83 3/8"-118 3/4"
cm 93x211,5-301,5 37 1/2"x83 3/8"-118 3/4"

L41 Scorrevole

pag. 033 – 034 – 035
laccato opaco grigo ferro
/ iron grey matte lacquer
pag. 037 – 038 – 039
vetro satinato / satin glass

versione per muratura / brickwall

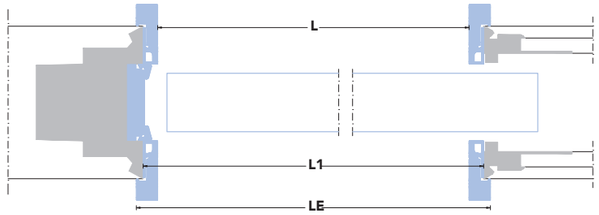

L41 scorrevole

L 41 scorrevole a scomparsa
Porta con anta a struttura tamburata di spessore mm 41 a lavorazione ultimata con finitura laccato opaco, lucido, essenze oppure con telaio perimetrale in alluminio e lastre di vetro. Stipite in alluminio in diverse finiture. Maniglia ad incasso. Montaggio su cassaporta metallica.

L41 Sliding-pocket
1 ¾ thick Swining door with high density Honeycomb structure. Door colors available in matt or polished lacquer, and wood veneers. Glass door version is obtained with aluminum surrounding and choice of full size light glass. The frame is available in different finishes. Flush handle. Installation requires a steel frame for stud wall.

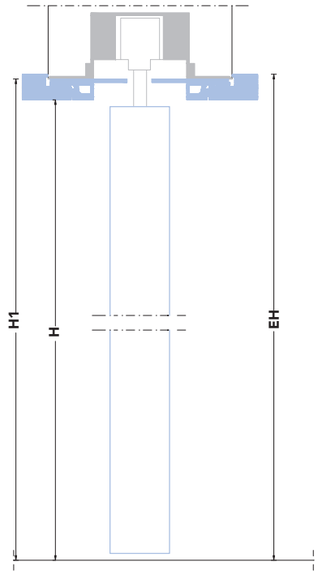

L
Larghezza luce netta
Opening width
cm 58 22 13/16″
cm 68 26 3/4″
cm 78 30 11/16″
cm 88 34 5/8″

L1
dimensione controtelaio
Subframe dimensions
cm 60 23 5/8″
cm 70 27 1/2″
cm 80 31 1/2″
cm 90 35 3/8″

LE
ingombro stipite
Frame dimensions
cm 61 24″
cm 71 27 15/16″
cm 81 31 7/8″
cm 91 35 13/16″

HE
ingombro stipite
Frame dimensions
cm 210,5 - 300,5 82 7/8″-118 5/16″

H
Altezza luce netta
Opening height
cm 209 - 299 82 1/4″-117 3/4″

H1
Dimensione controtelaio
Subframe dimensions
cm 209 - 299 82 1/4″-117 3/4″